


## Rtd Process Style Class 100M – Moderate Temp Range

### Capsule Rtd GENERAL PURPOSE

100 RTD Process Style, Capsule Configuration, General Purpose							
Code		Temperature Range					
M		Moderate Temp Range = -50 to 250C (-58 to 482F)					
Code		Accuracy					
P2A		Platinum, 100 Ohms ±.06%, .00385 temperature coefficient					
P2B		Platinum, 100 Ohms ±.12%, .00385 temperature coefficient					
P2C		Platinum, 100 Ohms ±.5%, .00385 temperature coefficient					
Code		Element Configuration					
3S		Three Wire Single (color code: red(2)/white)					
4S		Four Wire Single (color code: red(2)/white(2))					
3D		Three Wire Dual (color code: white/red(2)/black/green(2))					
Code		'L' Sheath Length					
000		Specify in Inches (example: 125 = 12.5 inches) Note: Minimum 1.5" and Maximum 36"					
Code		'D' Sheath Diameter					
A		1/8" Diameter (Single Element Only)*					
B		3/16" Diameter					
C		1/4" Diameter					
Code		Additional Options					
N		No Options					
W		Leadwire Options					
<b>100</b>	<b>M</b>					<b>Enter Desired Part Number Here</b>	
100	M	P2B	3S	095	C	W	Example Part Number

\* No Cable, Leadwire Only for 1/8" Diameter

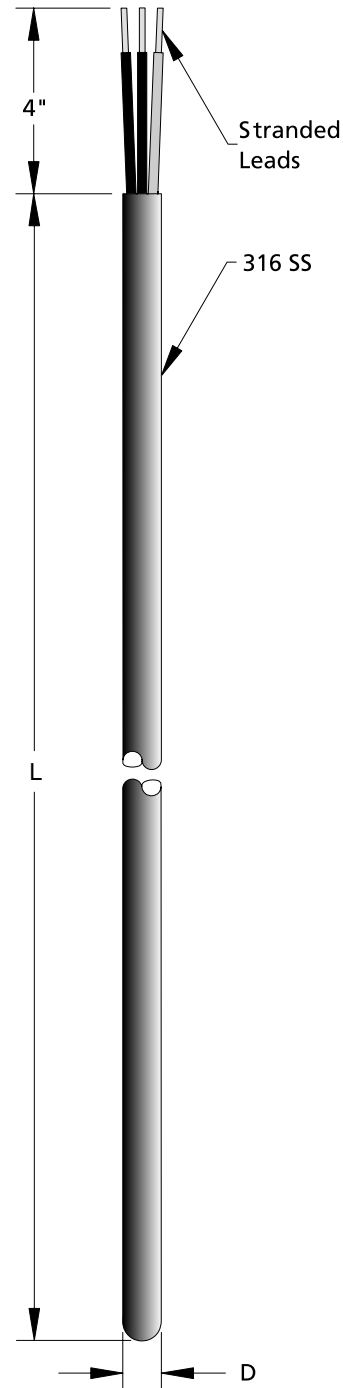

See Leadwire Configuration Section for Lead Options		
Typical Catalog number with leadwire options.		
100MP2B3S095CW	/	670060C004B
Catalog Number		Leadwire Option Code