



Rtd Process Style Class 105M – Moderate Temp Range


Capsule Rtd CUT-TO-LENGTH, ADJUSTABLE COMPRESSION FITTING

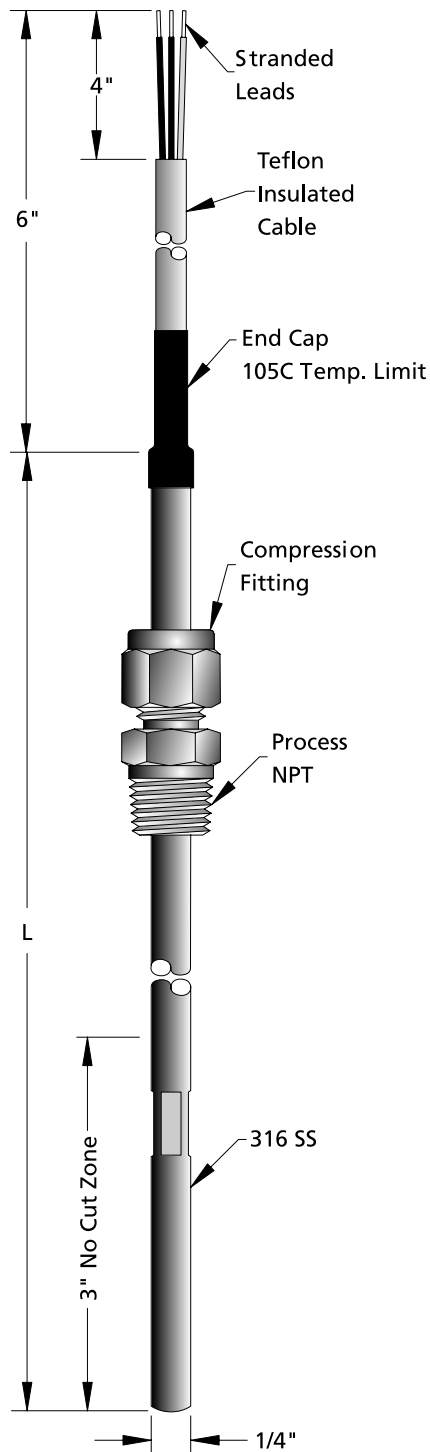


105 Rtd Process Style, Capsule Configuration, Cut-to-Length, Adjustable Compression Fitting							
Code	Temperature Range						
M	Moderate Temp Range = -50 to 250C (-58 to 482F)						
Code	Accuracy						
P2A	Platinum, 100 Ohms ±.06%, .00385 Temperature Coefficient						
P2B	Platinum, 100 Ohms ±.12%, .00385 Temperature Coefficient						
P2C	Platinum, 100 Ohms ±.5%, .00385 Temperature Coefficient						
Code	Element Configuration						
3S	Three Wire Single (color code: red(2)/white)						
4S	Four Wire Single (color code: red(2)/white(2))						
Code	'L' Sheath Length						
12	12 Inches						
24	24 Inches						
36	36 Inches						
Code	Process NPT Size						
A	1/8" NPT						
B	1/4" NPT						
C	3/8" NPT						
D	1/2" NPT						
E	3/4" NPT						
Code	Compression Fitting Material						
1	316 SS (Teflon ferrule included)						
2	316 SS (SS ferrule included)						
3	Brass (Brass ferrule included)						
105	M					Enter Desired Part Number Here	
105	M	P2A	3S	36	B	3	Example Part Number

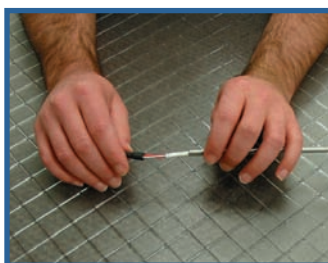


1. Remove end cap.

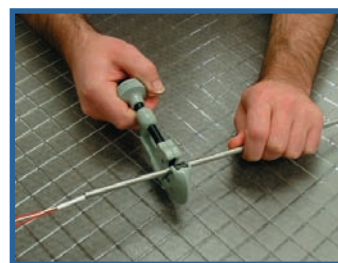

2. Cut to desired length.

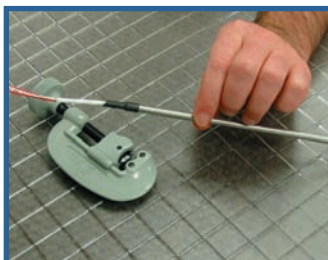

3. Replace end cap.

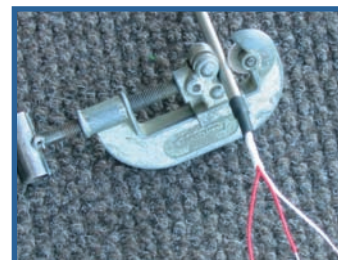

Tubing cutter required.