



Rtd Motor/Generator Style Class 313

Bearing Rtd, Tip Sensitive, with Armored Cable ADJUSTABLE HOLDER

313 Bearing Rtd, Bayonet Holder					
Code		Accuracy			
P2B		Platinum, 100 Ohm +/- .12% at 0C, .00385 temperature coefficient			
P2C		Platinum, 100 Ohm +/- .5% at 0C, .00385 temperature coefficient			
C1D		Copper, 10 Ohm +/- .2% at 25C, .00427 temperature coefficient			
N3C		Nickel, 120 Ohm +/- .5% at 0C, .00672 temperature coefficient			
Code		Element Configuration			
3S		Three Wire Single (color code: red/white(2))			
Code		'L' Armor Sheath Length			
000		Specify in Inches (example: 125 = 12.5 inches) Minimum 1.5"			
Code		Additional Options			
N		No Options			
A		1/8" NPT Mounting Adaptor Option			
B		Leadwire Options			
313 Enter Desired Part Number Here					
313	P2C	3S	125	W	Example Part Number

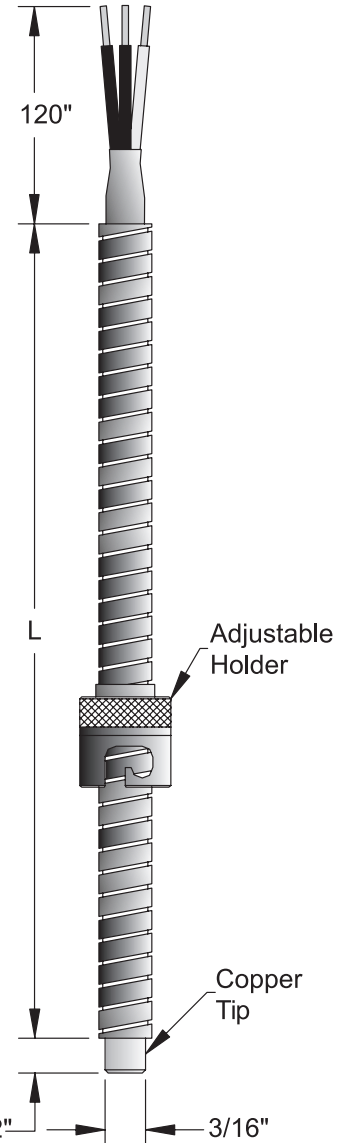

See Leadwire Configuration Section for Lead Options		
Typical Catalog number with leadwire options.		
313BP2C3S035W	/	670120C010H
Catalog Number		Leadwire Option Code

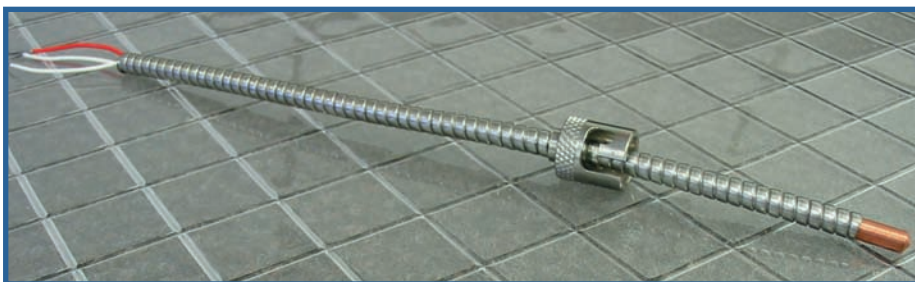

Motors