


## HVAC Rtd's Class 503M – Moderate Temp Range

### Point Sensing Rtd

CRIMPED PROCESS THREADED HEX FITTING ON RIGID GENERAL PURPOSE RTD

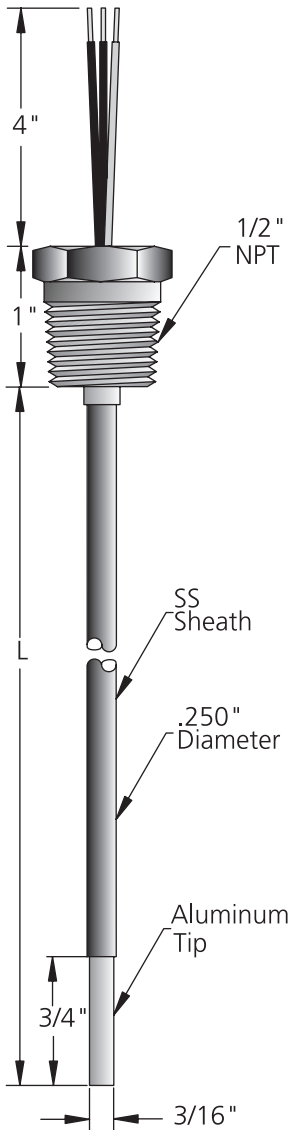

503 HVAC Rtd, Point Sensing, Crimped Process Threaded Hex Fitting						
Code		Temperature Range				
M		Moderate Temp Range = -50 to 250C (-58 to 482F)				
Code		Accuracy				
P2A		Platinum, 100 Ohms ±.06%, .00385 Temperature Coefficient				
P2B		Platinum, 100 Ohms ±.12%, .00385 Temperature Coefficient				
P2C		Platinum, 100 Ohms ±.5%, .00385 Temperature Coefficient				
Code		Element Configuration				
2S		Two Wire Single (color code: red/white)				
3S		Three Wire Single (color code: red(2)/white)				
4S		Four Wire Single (color code: red(2)/white(2))				
Code		'L' Sheath Length				
000		Specify in Inches (example: 125 = 12.5 inches) Minimum 1.5" and Maximum 72"				
Code		Additional Options				
N		No Options				
W		Leadwire Options				
<b>503</b>	<b>M</b>					<b>Enter Desired Part Number Here</b>
503	M	P2B	3S	125	W	Example Part Number

#### See Leadwire Configuration Section for Lead Options

Typical Catalog number with leadwire options.		
503MP2B3S125W	/	670000A004A
Catalog Number		Leadwire Option Code