
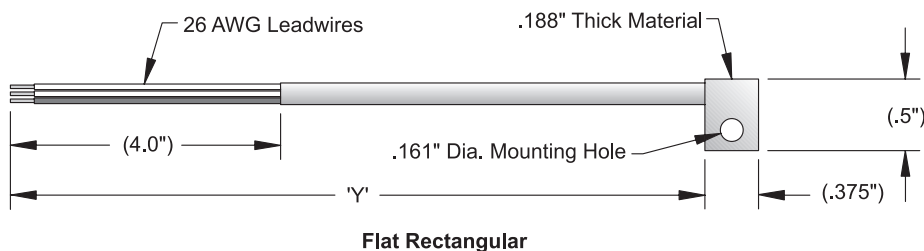
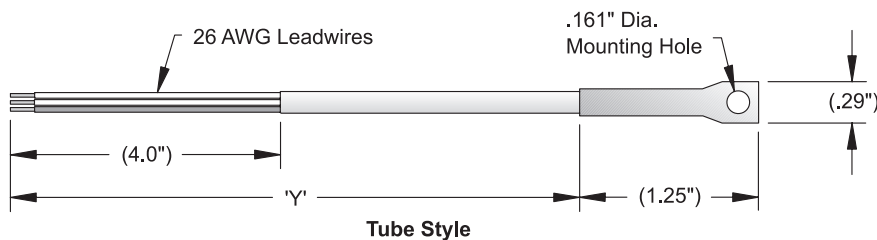
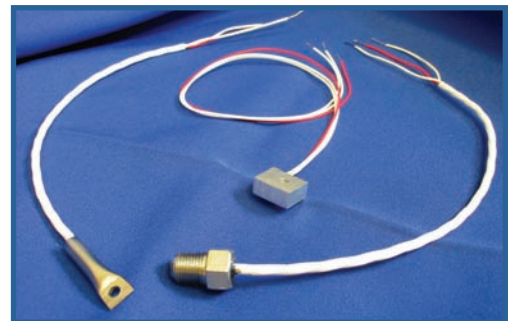


## OEM – Rtd Process Style Class 623M – Moderate Temp Range

### Bolt On Rtd BOLT ON SENSORS, 3 STAINLESS STEEL CONFIGURATIONS

| 623        |  | RTD, Bolt On |     |    |     |                                       |                     |
|------------|--|--------------|-----|----|-----|---------------------------------------|---------------------|
| Code       | Temperature Range  |              |     |    |     |                                       |                     |
| M          | Moderate Temp Range = -50 to 250C (-58 to 482F)                  |              |     |    |     |                                       |                     |
| Code       | Bolt On Model  |              |     |    |     |                                       |                     |
| A          | Threaded Bolt  |              |     |    |     |                                       |                     |
| B          | Tube Style   |              |     |    |     |                                       |                     |
| C          | Flat Rectangular   |              |     |    |     |                                       |                     |
| Code       | Accuracy   |              |     |    |     |                                       |                     |
| P2B        | Platinum, 100 Ohm +/- .12% at 0C, .00385 temperature coefficient |              |     |    |     |                                       |                     |
| P2C        | Platinum, 100 Ohm +/- .5% at 0C, .00385 temperature coefficient  |              |     |    |     |                                       |                     |
| N3C        | Nickel, 120 Ohm, +/- .5% at 0C, .00672 temperature coefficient   |              |     |    |     |                                       |                     |
| Code       | Element Configuration  |              |     |    |     |                                       |                     |
| 3S         | Three wire single (color code: red/white(2))                     |              |     |    |     |                                       |                     |
| Code       | 'Y' Leadwire Length  |              |     |    |     |                                       |                     |
| 000        | Specify in Inches (example: 020 = 20 inches)                     |              |     |    |     |                                       |                     |
| Code       | Leadwire Insulation  |              |     |    |     |                                       |                     |
| B          | Teflon insulated leads w/teflon jacket                           |              |     |    |     |                                       |                     |
| D          | Teflon insulated leads w/Stainless Steel Braid                   |              |     |    |     |                                       |                     |
| <b>623</b> | <b>M</b>   |              |     |    |     | <b>Enter Desired Part Number Here</b> |                     |
| 623        | M  | B            | P2C | 3S | 040 | B                                     | Example Part Number |

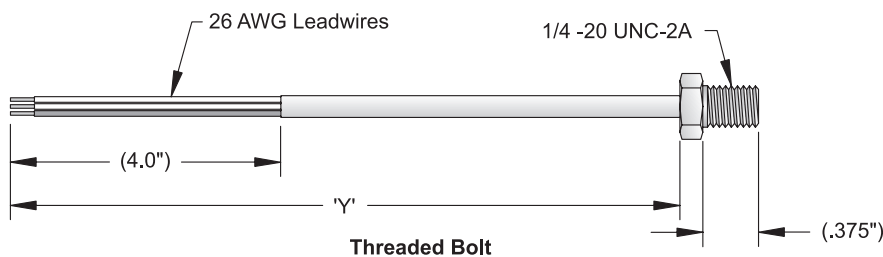

OEM