


## Hollow Wire Wound Elements Class 653

653		Hollow Wire Wound Element			
	<b>Code</b>	<b>Element Configuration</b>			
	C1D	Copper, 10 Ohm +/- .2% at 25°C, .00427 temperature coefficient			
	N3C	Nickel, 120 Ohm +/- .5% at 0°C, .00672 temperature coefficient			
	<b>Code</b>	<b>Applicable Copper Dimensions</b>			
		<b>"A"</b>	<b>"B"</b>	<b>"C"</b>	<b>"D"</b>
	1	1.25"	.125"	1"	26 AWG
	2	1.25"	.100"	1"	24 AWG
	3	1.25"	.062"	1"	26 AWG
		<b>Applicable Nickel Dimensions</b>			
	4	1.25"	.135"	2"	24 AWG
	5	.75"	.070"	1"	30 AWG
<b>653</b>			<b>Enter Desired Part Number Here</b>		
653	C1D	2	Example Part Number		



Standard Configuration

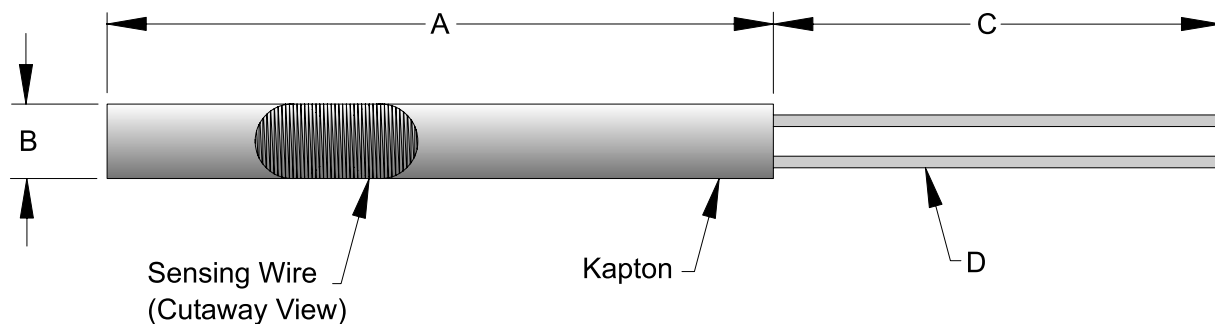