


Rtd Motor/Generator Style Class 314M – Moderate Temp Range

Bearing Rtd, Thrust

THRUST BEARING, GENERAL PURPOSE

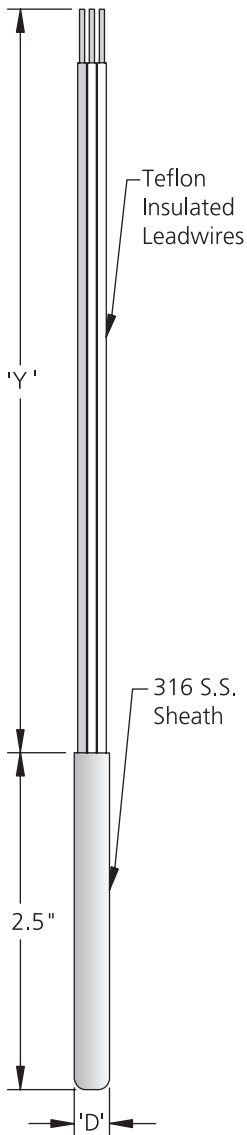

314 Rtd, Thrust Bearing, General Purpose							
Code		Temperature Range					
M		Moderate Temp Range = -50 to 250C (-58 to 482F)					
Code		Accuracy					
P2B		Platinum, 100 Ohms +/- .12% at 0C, .00385 temperature coefficient					
P2C		Platinum, 100 Ohms +/- .5% at 0C, .00385 temperature coefficient					
C1D		Copper, 10 Ohms +/- .2% at 25C, .00427 temperature coefficient					
N3C		Nickel, 120 Ohms +/- .5% at 0C, .00672 temperature coefficient					
Code		Element Configuration					
2S		Two Wire Single (color code: red/white)					
3S		Three Wire Single (color code: red(2)/white)					
Code		'Y' Leadwire Length					
000		Specify in Inches (example: 010 = 10 inches)					
Code		'D' Sheath Diameter		Lead Gage			
A		1/8" Diameter		28 AWG			
B		3/16" Diameter		26 AWG			
C		1/4" Diameter		22 AWG			
D		.215" Diameter		22 AWG			
Code		Additional Options					
N		No Options					
W		Leadwire Options					
314	M					Enter Desired Part Number Here	
314	M	P2C	3S	020	B	N	Example Part Number

