


HVAC Rtd's Class 514M – Moderate Temp Range

Averaging Rtd CONDUIT BOX

514		HVAC Rtd, Averaging, Conduit Box					
Code	Temperature Range						
M	Moderate Temp Range = -50 to 250C (-58 to 482F)						
Code	Accuracy						
P2B	Platinum, 100 Ohms ±.12%, .00385 Temperature Coefficient						
P2C	Platinum, 100 Ohms ±.5%, .00385 Temperature Coefficient						
Code	Element Configuration						
2S	Two Wire Single (color code: red/white)						
3S	Three Wire Single (color code: red(2)/white)						
4S	Four Wire Single (color code: red(2)/white(2))						
Code	'L' Sheath Length						
0000	Specify in Inches (example: '1500 = 1500 inches) Minimum 6" and Maximum 1800"						
Code	'M' Sheath Material						
A	316 Stainless Steel (50' Max. Length)						
B	Aluminum						
C	Copper						
Code	Additional Options						
N	No Options						
T	Transmitter Options						
W	Leadwire Options						
514	M					Enter Desired Part Number Here	
514	M	P2B	3S	0120	A	W	Example Part Number

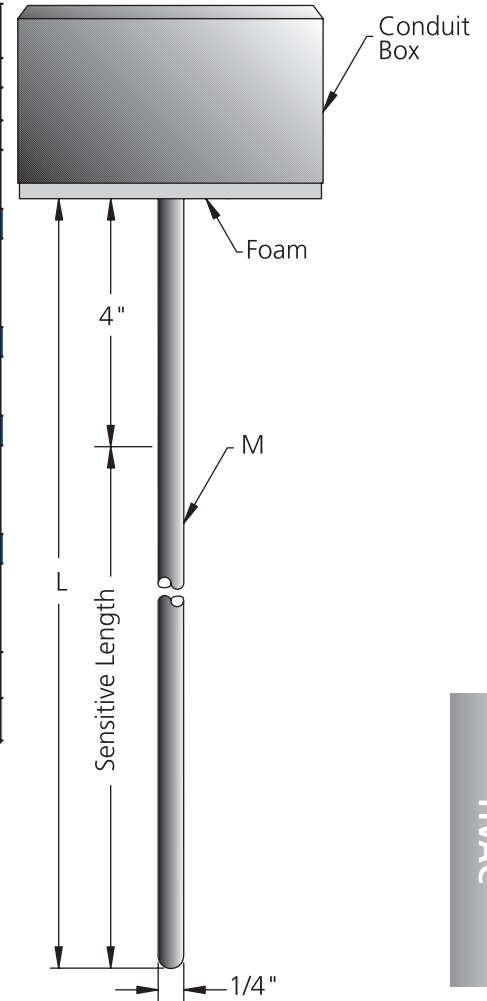

HVAC

Sensitive Length = L - 4"

See Leadwire Configuration Section for Lead Options		
Typical Catalog number with leadwire options.		
514MP2B3S125AW	/	670000A004A
Catalog Number		Leadwire Option Code

